


series 272

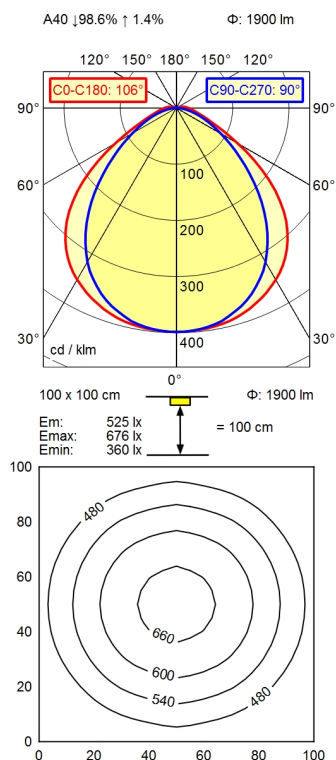

light source
work equipment
connected load
power consumption
luminous flux
luminous efficiency
light distribution
direct ratio
beam angle
colour temperature
colour temperatur
color rendering index (CRI)
chromaticity tolerance LED
glare control
luminance (L65)
unified glare rating (4H 8H)
system of protection
class of protection
technology
operation
housing
weight (net)
mains lead
fastening
dimension
light output
side part
special features

LED
without
230V, 50/60Hz
env. 24 W
approx. 1.900 lm
approx. 79 lm/W
direct
approx. 99 %
100°
neutral white
approx. 5.000 K
>= 80
< 4 SDCM
diffuser foil
<= 18000 cd/m²
<= 25
IP 67
I
switchable
external
borosilicate glass
env. 2 kg
connector; series 272
pipe clamp (accessory)
A=510 mm
D=456 mm
A with screwed cable gland
light forming